

© COPYRIGHT 2022 BY INDUSTRIAL FIBER OPTICS, INC.  
ALL RIGHTS RESERVED.

REVISIONS



REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial Release		9/23/2011	BB	AR
B	Updated thru hole specification	00408	5/13/2022	BB	DH

NOTES:

1. RoHS COMPLIANT  
(2011/65/EU AMENDMENT 2015/863)
2. -40° C TO +85° C OPERATING TEMPERATURE
3. SUITABLE FOR 1.5 mm POF WITH  
2.2 mm JACKET
4. TIA 604.1 (FOCIS 1) COMPATIBLE
5. MAXIMUM NUT TORQUE: 8 in-lbs
6. INCLUDES SILICONE DUST CAP

INSTRUCTIONS:


1. STRIP 18mm OF JACKET FROM FIBER.
2. SLIP BOOT OVER CABLE JACKET.
3. APPLY EPOXY TO BARE FIBER AND INSERT  
INTO FERRULE; ROTATE FIBER DURING  
INSERTION TO EVENLY DISTRIBUTE EPOXY.
4. CRIMP CONNECTOR TO CABLE JACKET  
USING .10" HEX CRIMP.
5. INSTALL BOOT OVER CONNECTOR.
6. POLISH AFTER EPOXY HAS CURED FULLY.

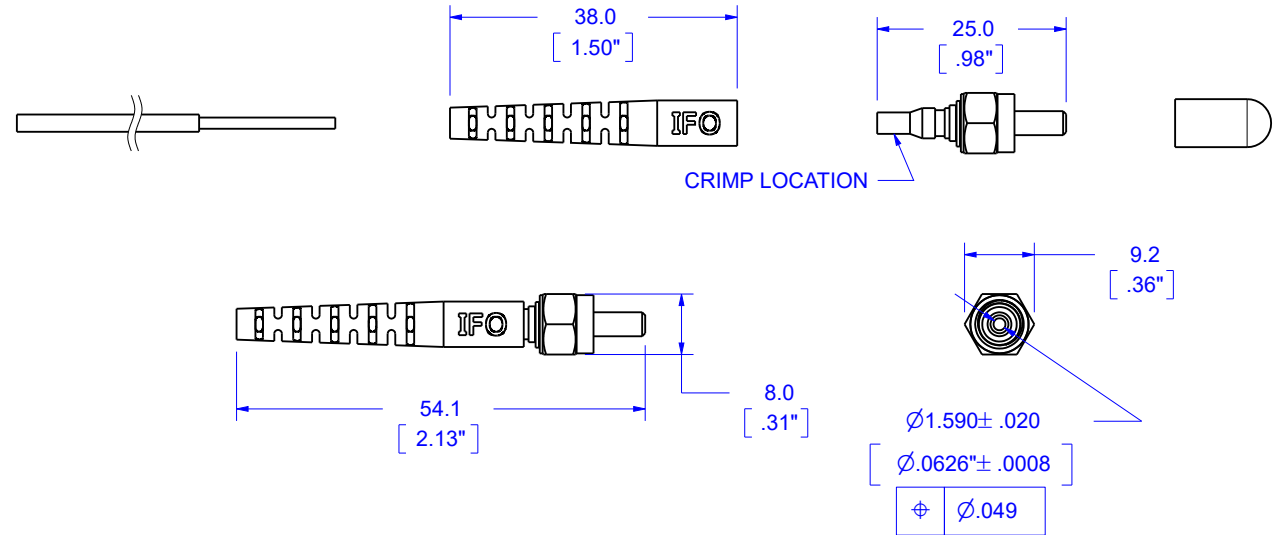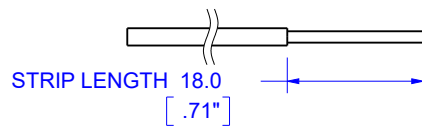

RECOMMENDED EPOXY:  
EPO-TEK 301

CRIMP TOOL FOR 2.2mm JACKETED CABLE:  
IF 370046  
USE 2.5 [.10"] HEX CRIMP

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]		PRODUCT	Industrial Fiber Optics TEMPE, AZ 85281				
DIMENSIONS ARE FOR REFERENCE ONLY NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT		MATERIAL	NAME <b>Connector SMA 1.5mm</b>				
		FINISH					
		DRAWN BY					
		DATE	9/23/2011	SIZE	SCALE	DOCUMENT NUMBER	REV
		CHECKED BY	A. Reyes	A	1:1	51 0181	B
		DATE	9/23/2011	DO NOT SCALE DRAWING		1 OF 1	



**METRIC**