




4

3

2

1

REVISIONS					
REV.	DESCRIPTION	ECO	DATE	DWN	APVD
00	Prerelease		9/22/2023	SA	BB
A	Initial release		9/29/2023	SA	BB

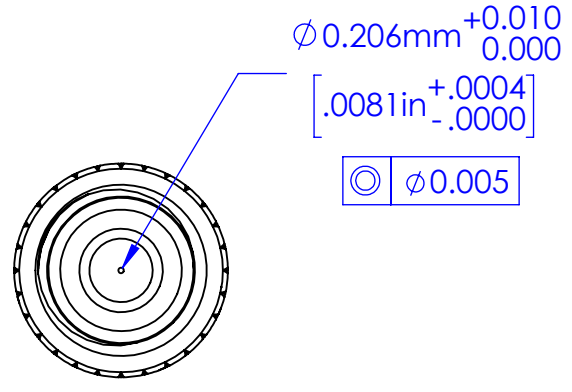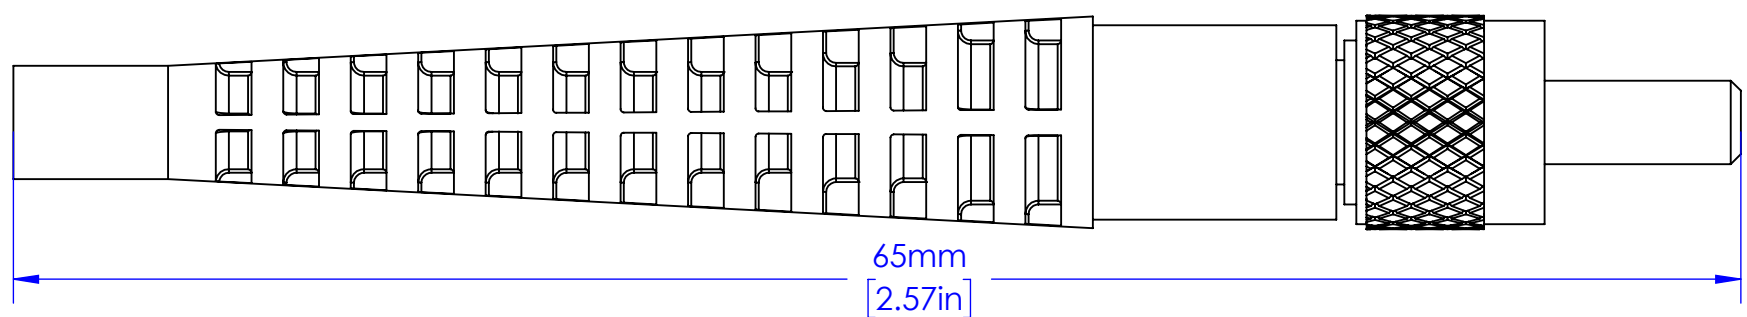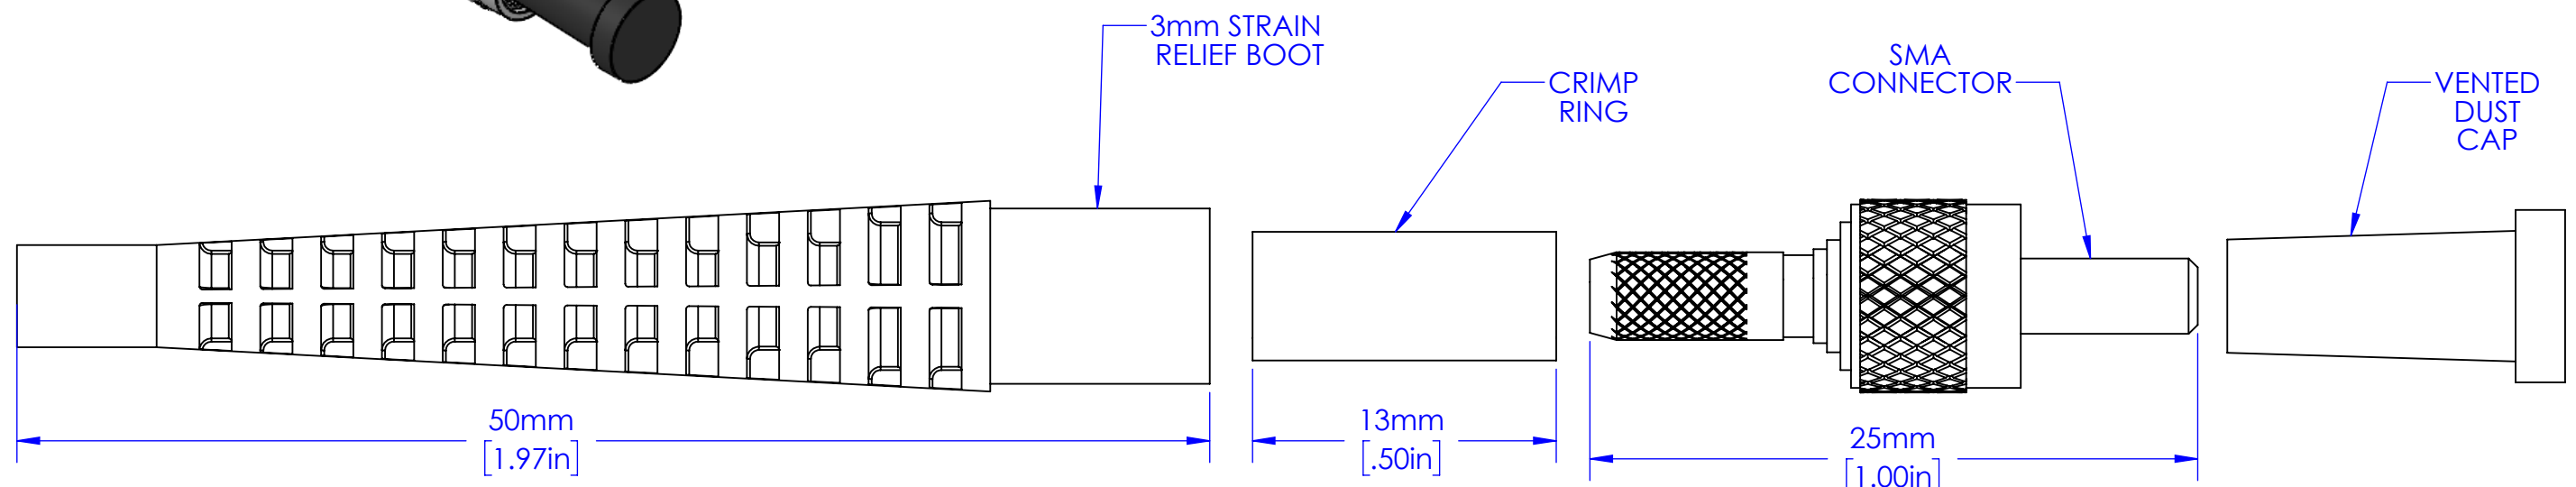

- NOTES:**
- SUITABLE FOR 175/190 GLASS OPTICAL FIBER.
 - RoHS COMPLIANT.
 - 40°C TO +85°C OPERATING TEMPERATURE.
 - IEC 61754-22 COMPATIBLE.
 - STAINLESS STEEL FERRULE & NUT; NICKEL PLATED COPPER CRIMP RING.
 - MAXIMUM NUT TORQUE: 0.9N-m [8in-lbs].

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INDUSTRIAL FIBER OPTICS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL FIBER OPTICS IS PROHIBITED.

DIMENSIONS	MILLIMETERS [IN]	UNLESS OTHERWISE SPECIFIED:	NAME	DATE	INDUSTRIAL FIBER OPTICS TEMPE, AZ 85281	
0 PLC:	±1.0	Customer:	DRAWN	S. Ahmed	9/22/23	TITLE: 206µm Knurled Connector; 3mm Boot
1 PLC:	±0.3		CHECKED	B. Bidwell	9/25/23	
2 PLC:	±0.13	INTERPRET GEOMETRIC TOLERANCING PER:ASME Y14.5-2009	COMMENTS: DIMENSIONS ARE FOR REFERENCE ONLY. NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT.			
3 PLC:	±0.025					MATERIAL
4 PLC:	±0.0127	MATERIAL	Not Applicable			B
ANGLE:	±1/2	FINISH	Passivated			A
APPLICATION		DO NOT SCALE DRAWING		SCALE: 1:1 WEIGHT:		SHEET 1 OF 1

4

3

2

1