

© COPYRIGHT 2022 BY INDUSTRIAL FIBER OPTICS, INC.  
ALL RIGHTS RESERVED.

REVISIONS




REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial Release		6/9/2010	BB	AR
B	Changed strip length	00242	8/12/2016	BB	AR
C	Updated thru hole specification	00408	5/13/2022	BB	DH

NOTES:

1. RoHS COMPLIANT  
(2011/65/EU AMENDMENT 2015/863)
2. -40° C TO +85° C OPERATING TEMPERATURE
3. SUITABLE FOR 0.75 mm POF WITH  
2.2 mm JACKET
4. TIA 604.1 (FOCIS 1) COMPATIBLE
5. MAXIMUM NUT TORQUE: 8 in-lbs
6. INCLUDES SILICONE DUST CAP

INSTRUCTIONS:

1. STRIP 12 mm OF JACKET FROM FIBER.
2. SLIP BOOT OVER CABLE JACKET.
3. APPLY EPOXY TO BARE FIBER AND INSERT  
INTO FERRULE; ROTATE FIBER DURING  
INSERTION TO EVENLY DISTRIBUTE EPOXY.
4. CRIMP CONNECTOR TO CABLE JACKET  
USING .10" HEX CRIMP.
5. INSTALL BOOT OVER CONNECTOR.
6. POLISH AFTER EPOXY HAS CURED FULLY.

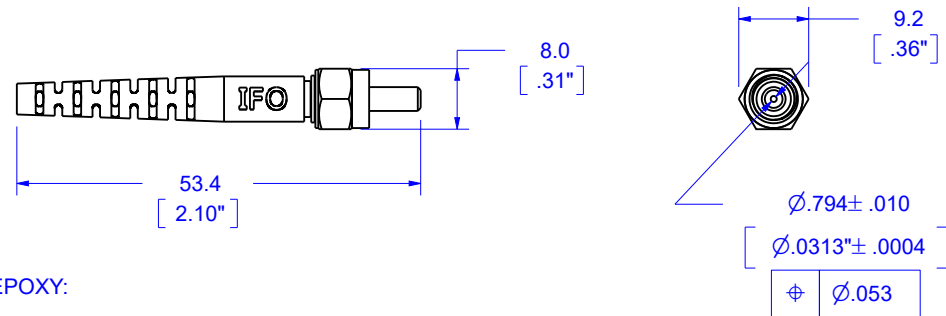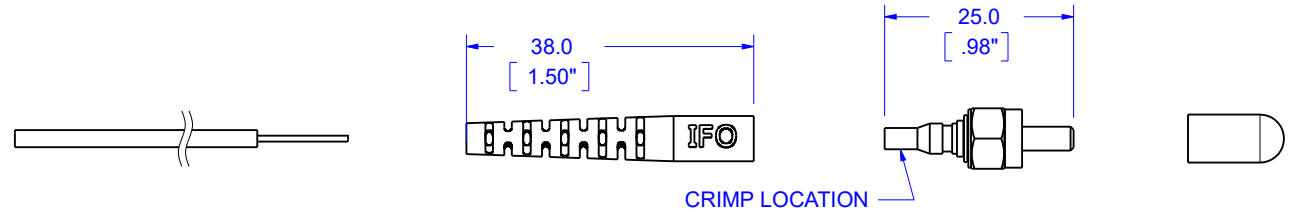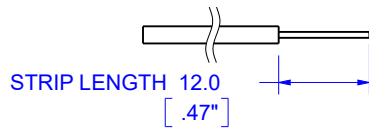


RECOMMENDED EPOXY:  
EPO-TEK 301

CRIMP TOOL FOR 2.2mm JACKETED CABLE:  
IF 370046  
USE 2.5 [.10"] HEX CRIMP

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	51 0073
	MATERIAL	Stainless Steel
DIMENSIONS ARE FOR REFERENCE ONLY NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT	FINISH	Passivated
	DRAWN BY	B. Bidwell
	DATE	6/9/2010
	CHECKED BY	A. Reyes
	DATE	6/9/2010

Industrial Fiber Optics TEMPE, AZ 85281			
NAME <b>Connector SMA 0.75mm</b>			
SIZE <b>A</b>	SCALE 1:1	DOCUMENT NUMBER 51 0073	REV <b>C</b>
DO NOT SCALE DRAWING		1 OF 1	



**METRIC**