


© COPYRIGHT 2023 BY INDUSTRIAL FIBER OPTICS, INC.  
ALL RIGHTS RESERVED.

REVISIONS


REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release, separated from 53 0000		10/17/2023	BB	DH

- Notes:
- Some flash material (strings of cladding or jacket) is typical around the ends of light pipes.
  - Ends are cut with an end finish equivalent to a 30 μm polish or better.

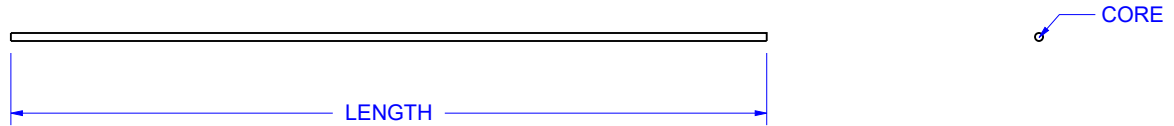

Series	Fiber	Min Bend Radius
IF 10C3	CK-30	15 mm
IF 10C4	CK-40	25 mm
IF 10C6	CK-60	40 mm
IF 10C8	CK-80	80 mm
IF 10C12	CK-120	100 mm

LENGTH	TOLERANCE
5 cm	+0.4/-0 cm
6-30 cm	±0.2 cm
31-59 cm	±0.3 cm
60-99 cm	±0.4 cm
100-300 cm	±0.5 cm

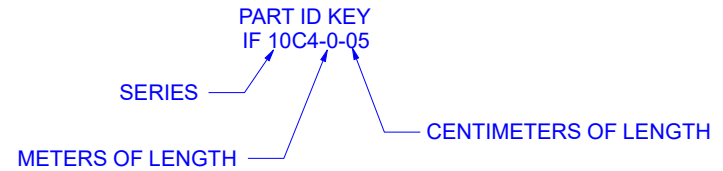


UNLESS OTHERWISE SPECIFIED  
DIMENSIONS MILLIMETERS [IN.]

DIMENSIONS ARE FOR  
REFERENCE ONLY  
NO TOLERANCES MAY BE  
IMPLIED FROM THIS DOCUMENT

PRODUCT	
MATERIAL	
FINISH	
DRAWN BY	B. Bidwell
DATE	10/17/2023
CHECKED BY	D. Hanson
DATE	10/17/2023

Industrial Fiber Optics TEMPE, AZ 85281			
NAME <b>Unjacketed Light Pipes</b>			
SIZE <b>A</b>	SCALE 1:1	DOCUMENT NUMBER 53 0001	REV <b>A</b>
DO NOT SCALE DRAWING		1 OF 1	



**METRIC**