

No

1. Scope

This specification covers basic requirements for the structure and optical performances of LH-4001-1.3.


2. Structure

Table 1

LH-4001-1.3

Item		Specification			
		Unit	Min.	Typ.	Max.
Optical Fiber	Core Material	—	Polymethyl-Methacrylate Resin		
	Cladding Material	—	Fluorinated Polymer		
	Core Refractive Index	—	1.49		
	Refractive Index Profile	—	Step Index		
	Numerical Aperture	—	—	0.5	—
	Core Diameter	μm	—	75	—
	Number of cores	—	151		
	Fiber Diameter	μm	940	1,000	1,060
Jacket	Material	-	Polyethylene		
	Color	-	Black		
	Diameter	mm	1.25	1.30	1.35
Approximate Weight		g/m	1.5		
Indication on the Jacket		-	None		

Sectional View

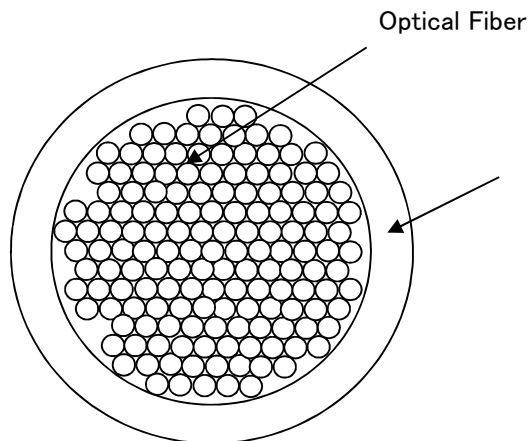

3. Performances

Table 2

Item		Acceptance Criterion and/or [Test Condition]	Specification			
			Unit	Min.	Typ.	Max.
Maximum Rating	Storage Temperature	No Physical Deterioration [in a Dry Atmosphere]	°C	- 40	-	+ 70
	Operation Temperature	No Deterioration in Optical Properties* [in a Dry Atmosphere]	°C	0	-	+ 70
		No Deterioration in Optical Properties** [under 95%RH condition]	°C	-	-	+ 60
Optical Properties***	Transmission Loss [650nm Collimated Light]	[25°C 50%RH]	dB/km	-	-	400
		[Operation Temperature]	dB/km	-	-	450
Mechanical Characteristics	Minimum Bend Radius	Loss Increment ≤ 0.5 dB [A Quarter Bend]	mm	2	-	-
	Repeated Bending Endurance	Loss Increment ≤ 1 dB [in Conformity to the JIS C 6861]	Times	1,000	-	-
	Tensile Strength	Tensile Force at 5% Elongation; in Conformity to the JIS C 6861]	N	65	-	-
	Twisting Endurance	Loss Increment ≤ 1 dB [Sample Length : 1m Tensile Force : 4.9N]	Times	-	-	-
	Impact Endurance	Loss Increment ≤ 1 dB [in Conformity to the JIS C 6861]	N·m	-	-	-

All tests are carried out under temperature of 25°C unless otherwise specified.

* Attenuation change shall be within +/- 10% after 1,000 hours.

** Attenuation change shall be within +/- 10% after 1,000 hours, except that due to absorbed water.

*** The number of dead cores or sick cores is less than 15.

The specifications is subject to change without notice.

The information contained herein is presented as guide for the product selection.

Please contact our business department for the issue of an official specification sheet.