

Specifications for Plastic Optical Fiber


Multicore POF[™] MCQ-1500-22

Issued on : April 8, 2020

Issued by : Asahi Kasei Corporation
Plastic Optical Fiber
Marketing & Development Gr

1, STRUCTURE

ITEM	UNIT	Specifications
Core Material		PMMA
Clad Material		Fluorinated Polymer
Core reflective index		1.49
Reflective index Profile		Step index
Fiber Diameter	μm	1500 ± 90
Core Number		613
NA		0.5
Jacket Material		PE
Jacket Diameter	μm	2200 ± 70
Jacket Color		Black
Approx. weight	g/m	3.9

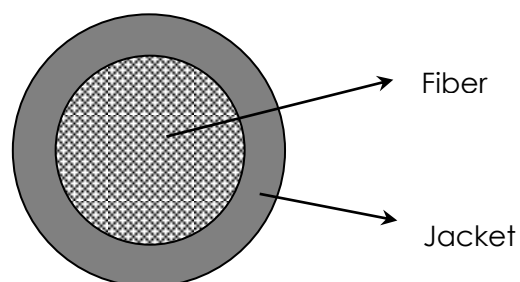

2, PROPERTIES

ITEM	UNIT	Specifications	
Storage Temperature Range	°C	-55 ~ 60	
Application Temperature Range	°C	-55 ~ 60	
Attenuation	dB/km	≤ 600	*1
Tensile Strength at Break Point	N	≥ 150	*2
Minimum Bending Radius	mm	3	*3

Sample conditions

Temperature: T = 23°C
Humidity: RH = 50%
Storage time: t = 200h

*1 : Light Source : LED (Peak Wavelength = 657nm), 20-2m Cut-back Method

*2 : Interval between grippers = 100 mm, Tensile Speed = 100mm/min

*3 : L = 2m, 90 degree bending at the middle of fiber

Light Source : LED (Peak Wavelength = 657nm)

Transmission Rate ≥ 90%

3, RoHS certification

The product does not contain RoHS 2 hazardous substances, Cadmium, Lead, Mercury, Chromium (VI), PBB, PBDE, DIBP, DEHP, DBP and BBP intentionally.