




A Furukawa Company

Your Optical Fiber Solutions Partner®

OFS | www.ofsoptics.com

### Item # P26763-01, LC Crimp & Cleave Connector

LC (Beige Boot ) for GiHCS 50/200/230 , 62.5/200/230 GiHCS® and 200/230 HCS

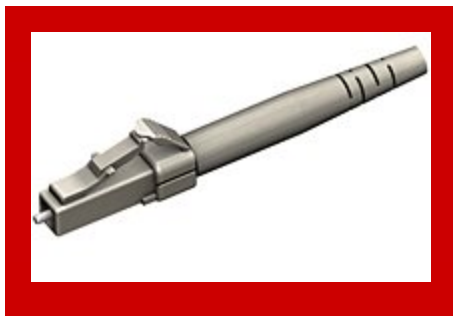

[Specifications](#) | [Connector Performance Data](#) | [Cable Design](#) | [Compatibility](#) | [Ordering Information](#)

#### Specifications

<b>Color</b>	Beige
<b>Connector Type</b>	Simplex
<b>For Use With Optical Fiber Cable Types</b>	<u>Graded-Index 50/200/230 and 62.5/200/230 GiHCS® V-System® cables.</u>

#### Connector Performance Data

<b>Typical Insertion Loss @ 850 nm</b>	50/200/230 GiHCS® - 1.0 dB 62.5/200/230 GiHCS® - 1.0 dB
<b>Maximum Insertion Loss @ 850 nm</b>	50/200/230 GiHCS® - 1.5 dB 62.5/200/230 GiHCS® - 1.5 dB
<b>Typical Insertion Loss @ 1300 nm</b>	50/200/230 GiHCS® - 1.2 dB 62.5/200/230 GiHCS® -1.2 dB
<b>Maximum Insertion Loss @ 1300 nm</b>	50/200/230 GiHCS® - 1.7 dB 62.5/200/230 GiHCS® - 1.7 dB

<b>Operating Temperature</b>	-40 to +85 °C
<b>Cable Crimp Retention</b>	4.99 lb 22.2 N
<b>Overall Length (without boot)</b>	1.53 Inch 39 mm
<b>Overall Length (with boot installed)</b>	2.18 Inch 55 mm

**Cable Design** -

<b>Jacket Diameter</b>	2.2 mm
------------------------	--------

**Compatibility** -

<b>Compatible Termination Kit</b>	DT03732-LC1
<b>Compatible Insertion Loss Test Kit</b>	P10188-15

**Ordering Information** -

<b>Order From Location</b>	AVON LOCATION 1.888.438.9936 toll-free in the United States and Canada 1.860.678.0371 from outside the U.S.A. 55 Darling Drive Avon, CT 06001, USA
<b>Order By Item #</b>	P26763-01